

Pleat

Wall Panel


spinneybeck




Pleat brings wood into the fold.

Inspired by the soft folds of textiles and drapery, Pleat creates undulating waves that ripple across the wall with a mid-century modern twist. Influenced by the molded plywood furniture of the mid-century modern era, Lars Beller Fjetland brings a design icon into the twenty-first century. Installation is quick and straightforward with Z-Clips and a thin, horizontal shelf provides a functional design element.


Pleat was designed by Lars Beller Fjetland, a Norwegian designer who marries timelessness and longevity through an immediate, honest functionalism in form and aesthetic.

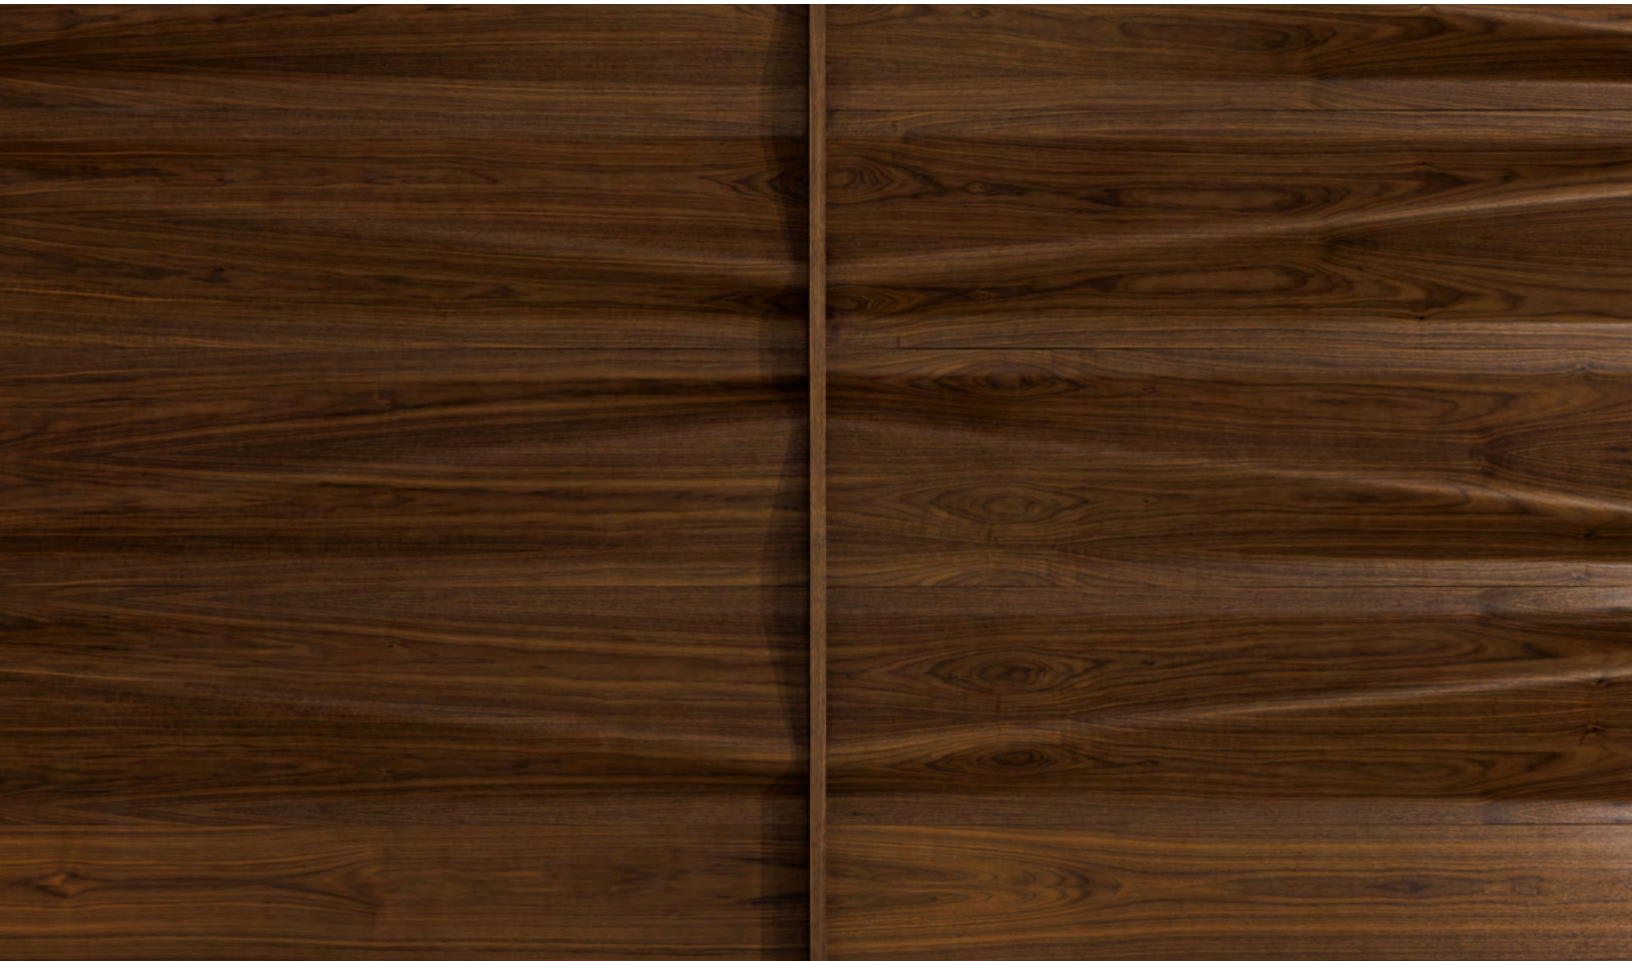

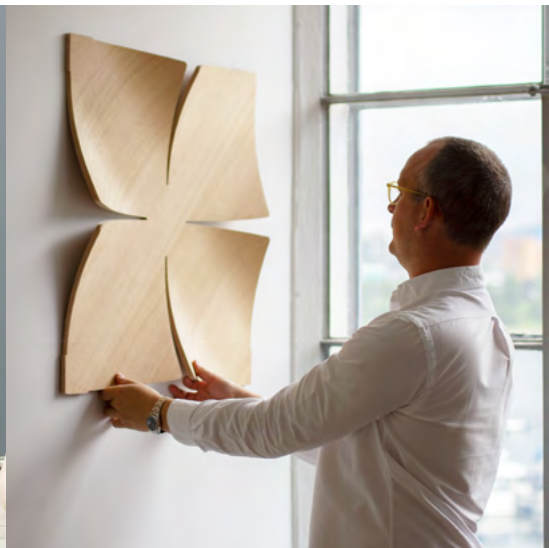


“I strongly believe that it’s our responsibility as designers to create products that solve existing problems without creating new ones. This is the only sustainable way of introducing a new product into the market. We need to be thinking about the entire lifecycle of a product, from cradle to grave. This should be the rule, rather than the exception.”


– Lars Beller Fjetland, designer of Pleat

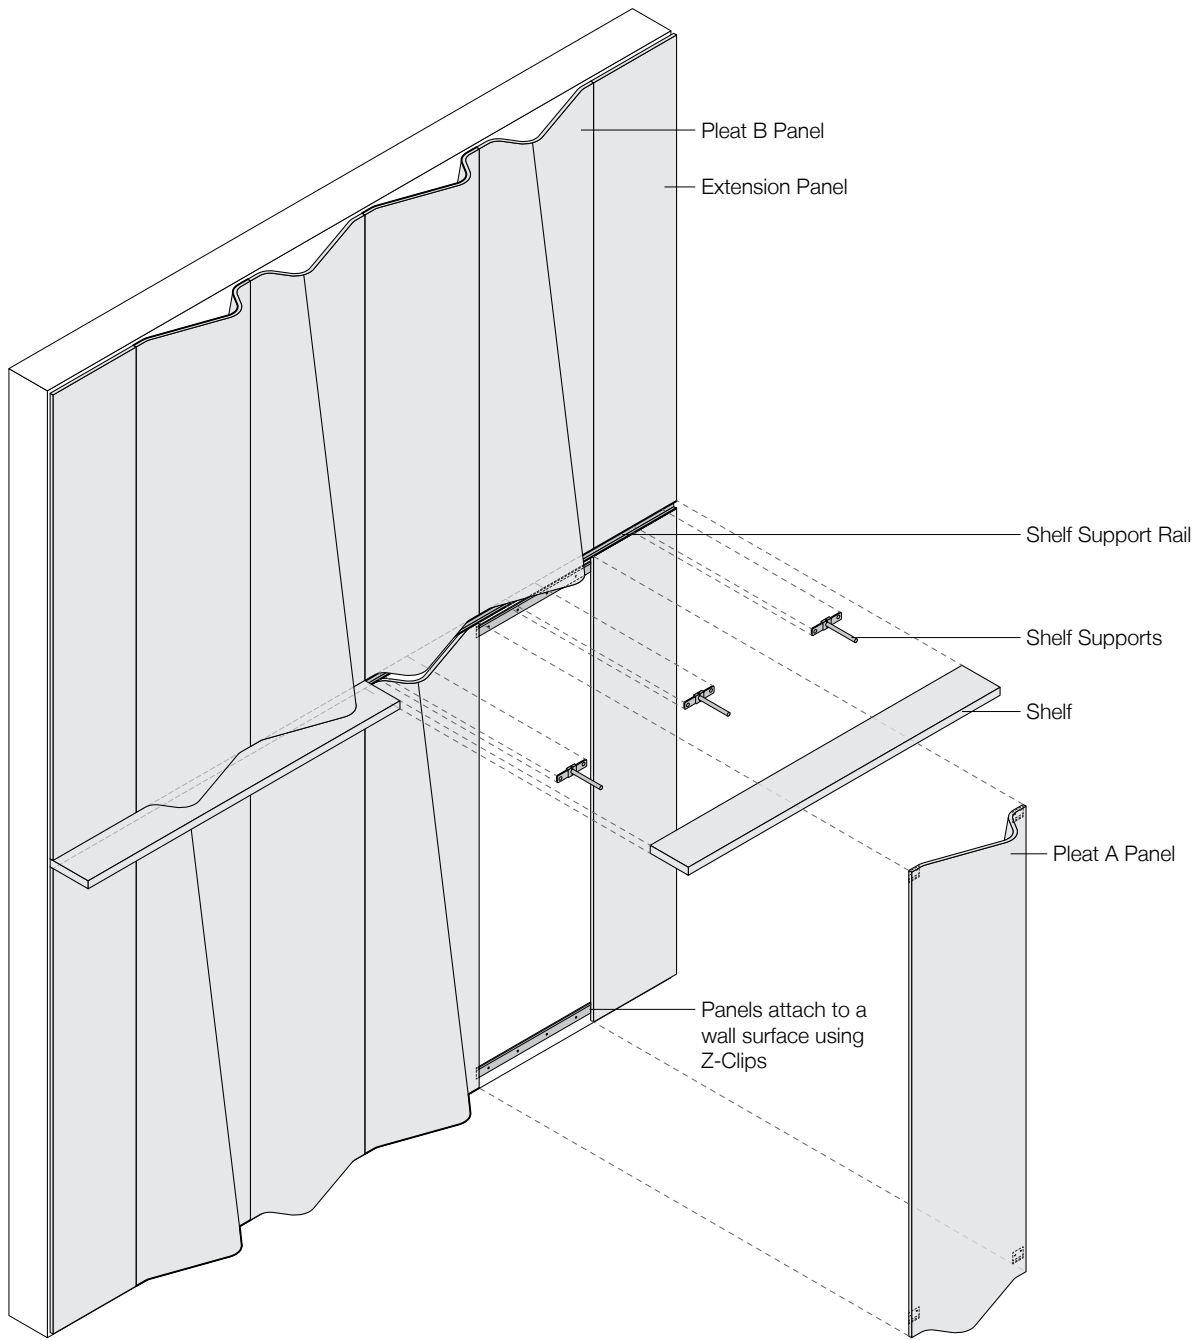

Exploded Axonometric

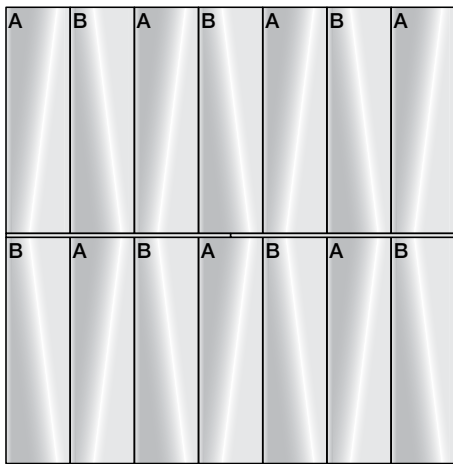


Pattern 1
Alternate A + B

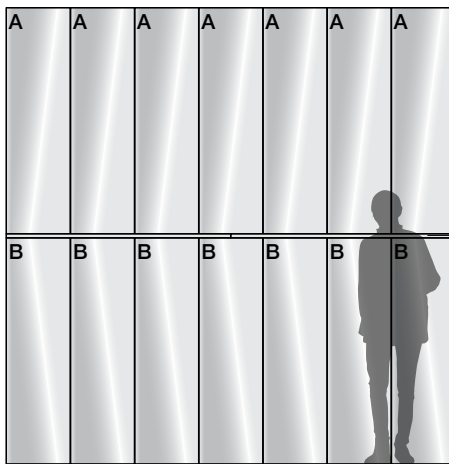


Pattern 2
Repeat A, Repeat B

Shelf in
Horizontal Position

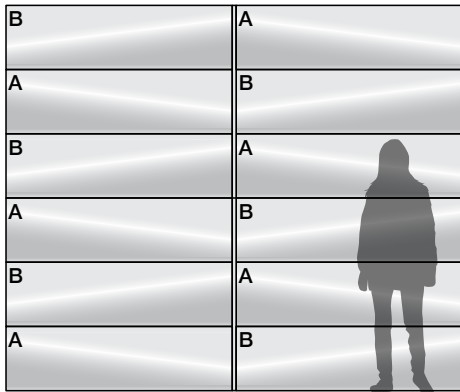


Pattern 3
Alternate A + B

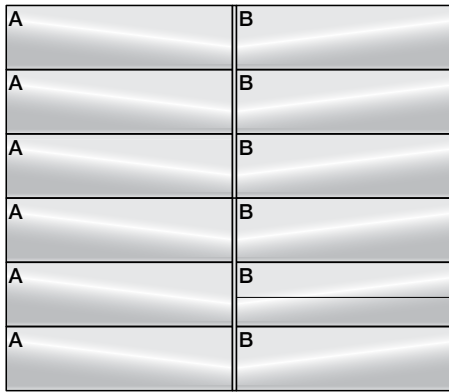

Pattern 4
Repeat A, Repeat B

Shelf in
Vertical Position

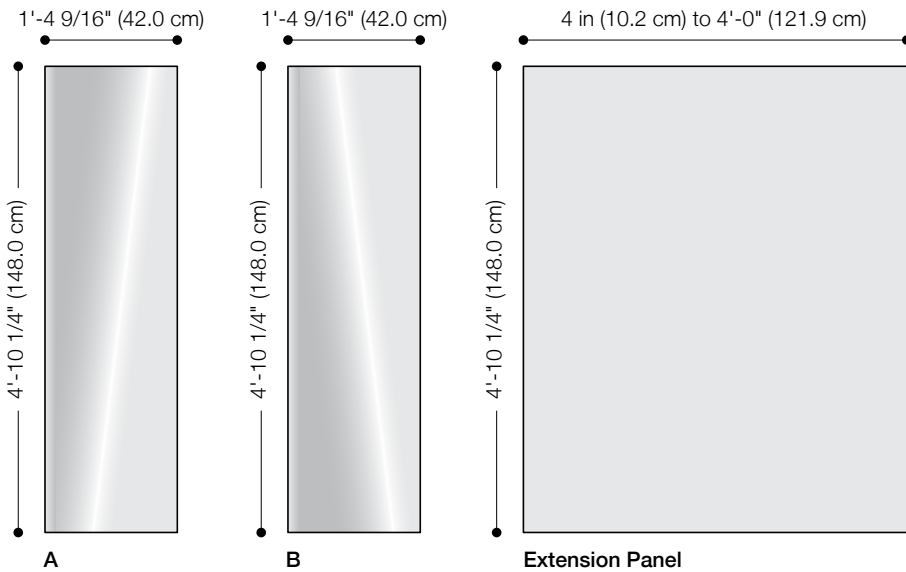

Pleat Panels
1 in (9.8 cm) Shelf Divides Horizontal Rows

Patterns are shown as suggested installations only

Product	Pleat
Designer	Lars Beller Fjetland
Content	Wood Veneer + Baltic Birch Plywood
Panel Size	A, B: 1'-4 9/16" x 4'-10 1/4" (42.0 x 148.0 cm)
Thickness	A, B: 3 7/8 in (9.8 cm) (includes Z-Clips) Shelf: 5 1/2 in (14.0 cm)
Grain Direction	Vertical
Color Option	1-Color per wall
Edges	Baltic Birch Plywood Finished
Trim Option	Extension Panels
Custom	2-Color+ per wall is available and must be quoted
Durability	Contract or residential
Lead Time	Made to order and certain lead times will apply
Installation	Install in the pattern as specified and attach to a wall surface with Z-Clips provided (wall screws not included). Additional blocking at installation site may be required. Refer to Pleat Installation Instructions for complete guidance.
Maintenance	Use a very mild non-abrasive, non-ammonia, and non-alcohol containing soap diluted in a room temperature water solution. Apply with a soft flannel cloth, followed by a dry cloth. Always wipe in the direction of the grain. Never use commercial cleaners, abrasives, solvents, or glass cleaner on any wood components as it will wear away the finish. Never apply wax as this will interact with the finish.
Variation	Wood is a natural material and minor changes in color are evidence of the 100% natural origin of the material.
Environmental	Wood Veneer + Baltic Birch Plywood are 100% recyclable Contains no formaldehyde CARB Compliant
Flammability	ASTM E 84: Class B (Fire Rated)

Standard Colors




White Pine



Douglas Fir



White Oak



Walnut